


36/8 Soffit Hangers

- ✓ **BS EN 845 Compliant**
- ✓ **PD 6697:2010 Compliant**
- ✓ **Material Reference 3**
-Austenitic Stainless Steel
- ✓ **Mechanical Failsafe System**
- ✓ **Uses Standard Bricks**
- ✓ **Allows Colour Match**
- ✓ **No Enhanced Lead Times**

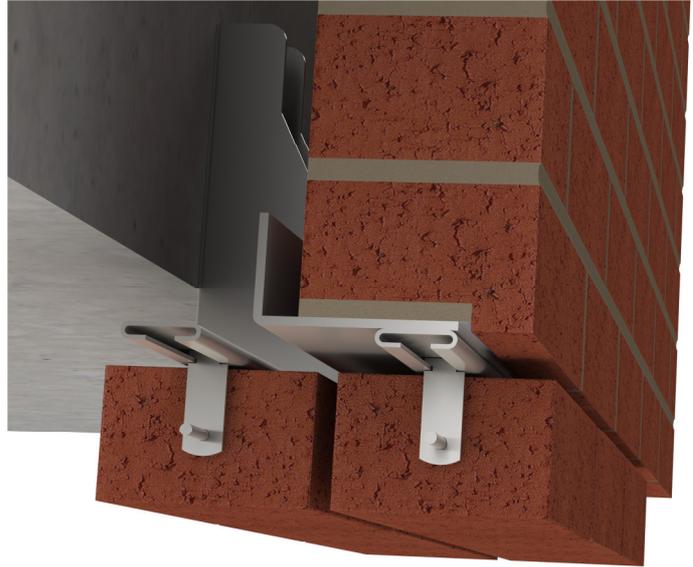




Technical Data

ACS Soffit Hangers are a bespoke product utilising 36/8 Channel & Ties combined with ACS restraint dowels. The system has been designed to allow a 500mm spacing between brackets and a 250mm end cantilever as standard. Special configurations can be designed to almost any application.

Installation & Best Practice

The first brick is to be drilled at either end and the first tie clipped into the channel with a one way welded dowel. The first brick will then have both ends filled with either resin or a non shrinkable grout. The brick will then be pushed on the welded dowel tie and another tie will be slid into position and a 6x60mm loose dowel pushed through the hole to fully support the brick. This process is then repeated along the full length of the soffit opening until the last brick is to be installed. The final tie with a one way welded dowel will then be slid into position which completes the hanging process. Please ensure that all soffit bricks are temporarily propped until the whole system is cured.

Component	Capacity
36/8 Tie	0.5kN
6mm Ø Dowel	6.79kN

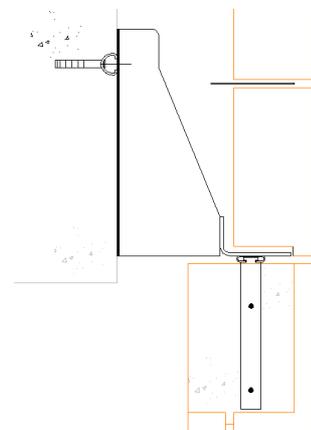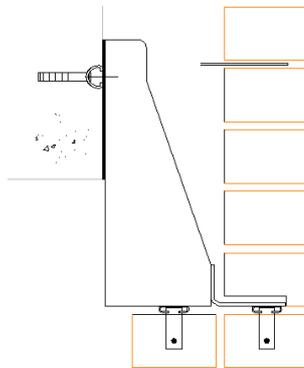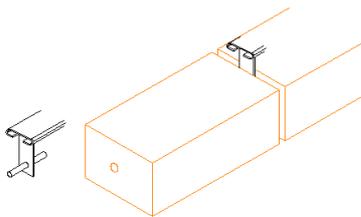

For further information or technical assistance please contact the ACS Technical Department on 0844 850 0860 or email technical@acsstainless.co.uk

LEEDS
Cross Green Approach
Cross Green Industrial Park
Leeds LS9 0SG
Tel: +44 (0)113 391 8200
Fax: +44 (0)113 391 8209

LONDON
Crown House
Home Gardens
Dartford
Tel: +44 (0)1322 424 510
Fax: +44 (0)1322 424 504

GLASGOW
Festival House
150 Brand Street
Glasgow G51 1DH
Tel: +44 (0)141 314 0048
Fax: +44 (0)141 314 0026

