


Technical Data Sheet

ACS L4 Cavity Lintel

- ✓ Cavity Lintel
- ✓ 95 – 110mm Cavity
- ✓ Up to 4.8m as standard
- ✓ Standard duty loading
- ✓ Stainless steel 304 or 316
- ✓ Galvanised Carbon Steel

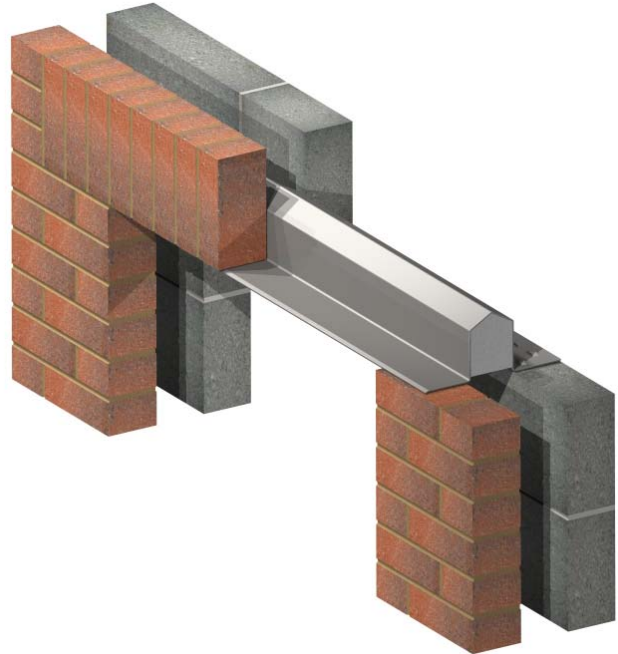

Installation

Minimum block strength 2.8N/mm² and grade 3 III mortar, minimum masonry height 225mm installed in line with recommendations of BS 5628

Manufactured Length (mm)	0600 – 1500	1650 – 1800	1950 - 2100	2250 – 2400	2550 - 3000	3150 - 3600	3750 - 4800
Height (mm)	96	124	136	149	174	204	207
Thickness (mm)	2.0	2.5	2.5	2.8	2.8	3.0	3.0
Allowable UDL (kN)	12	18	20	23	30	30	26
I _{xx} (cm ⁴)	108	241.1	307.9	430.2	637.6	1022.4	1164.0
Z _{xx} (cm ³)	16.61	30.19	35.41	45.79	59.17	82.39	87.39
Finished Weight (kg/m)	6.95	9.62	10.11	11.87	12.97	15.31	17.19

For further information or technical assistance please contact the ACS Technical Department on 0870 850 0860 or email technical@acsstainless.co.uk

LEEDS
Cross Green Approach
Cross Green Industrial Park
Leeds LS9 0SG
Tel: +44 (0)113 391 8200
Fax: +44 (0)113 391 8209

LONDON
Crown House
Home Gardens
Dartford
Tel: +44 (0)1322 424 510
Fax: +44 (0)1322 424 504

GLASGOW
Festival House
150 Brand Street
Glasgow G51 1DH
Tel: +44 (0)141 314 0048
Fax: +44 (0)141 314 0026

